

Absolute Encoders – Multiturn

Compact, optical

Sendix F3668 / F3688 (Shaft / Hollow shaft)

CANopen



The Sendix F36 multiturn with the patented Intelligent Scan Technology™ is an optical multiturn encoder in miniature format, without gears and with 100% insensitivity to magnetic fields. With a size of just 36 x 42 mm it offers a shaft or a blind hollow shaft of up to 10 mm.



Recipients of the MessTec & Sensor Master 2010 Award and the Golden Mousetrap Award 2009.

Ex 2/22 cULus pending




CANopen



Safety-Lock™



High rotational speed



Temperature

-40° +85°



High IP value



High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Short-circuit proof



Reverse polarity protection



Optical sensor



Seawater-resistant version on request

Reliable and magnetically insensitive

- Sturdy bearing construction in Safety Lock™ Design for resistance against vibration and installation errors
- Reduced number of components ensures magnetic insensitivity
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40°C up to +85°C
- Patented Intelligent Scan Technology™ with all singleturn and multiturn functions on one single OptoAsic - offering highest reliability, a high resolution up to 41 bits and 100% magnetic field insensitivity

Up-to-the-minute Fieldbus performance

- CANopen with current encoder profile
- LSS services for configuration of the node address and baud rate
- Variable PDO mapping in the memory

Order code

Shaft version

8.F3668 . XX 2X . 21 12

Type

a

b

c

d

e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.

10 by 10

a Flange, ø 36 mm

- 1 = clamping flange, IP67
- 2 = synchro flange, IP67
- 3 = clamping flange, IP65
- 4 = synchro flange, IP65

b Shaft (ø x L), with flat

- 1 = ø 6 x 12,5 mm
- 2 = ø 6,35 (1/4") x 12,5 mm
- 3 = ø 8 x 15 mm
- 4 = ø 9,5 x 15,875 mm (3/8" x 5/8")
- 5 = ø 10 x 20 mm

c Interface / Power supply

- 2 = CANopen DS301 V4.02 / 10 ... 30 V DC

optional on request

- Ex 2/22
- seawater-resistant
- special cable length

d Type of connection

- 1 = cable, tangential (1 m PUR)
- 3 = cable, tangential (5 m PUR)

e Fieldbus profile

- 21 = CANopen Encoder profile DS406 V3.2

Order code

Hollow shaft

8.F3688 . XX 2X . 21 12

Type

a

b

c

d

e

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.

10 by 10

a Flange, ø 36 mm, IP65

- 1 = with torque stop, short
- 2 = with stator coupling
- 3 = with torque stop, long

b Blind hollow shaft

- 4 = ø 10 mm
- 5 = ø 6 mm
- 6 = ø 6.35 mm (1/4")
- 7 = ø 8 mm

c Interface / Power supply

- 2 = CANopen DS301 V4.02 / 10 ... 30 V DC

optional on request

- Ex 2/22
- seawater-resistant
- special cable length

d Type of connection

- 1 = cable, tangential (1 m PUR)
- 3 = cable, tangential (5 m PUR)

e Fieldbus profile

- 21 = CANopen Encoder profile DS406 V3.2

Compact, optical

Sendix F3668 / F3688 (Shaft / Hollow shaft)

CANopen

General information about CANopen

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02. In addition, device-specific profiles like the encoder profile DS406 V3.2 are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CAN-Bus. When switching the device on, all parameters, which have been saved on a flash memory to protect them against power failure, are loaded again.

The following output values may be combined in a freely variable way as PDO (PDO mapping): **position**, **speed** as well as the **status of the working area**.

The encoders are available with a connector or a cable connection.

The device address and baud rate can be set/modified by means of the software.

The two-colour LED located on the back indicates the operating or fault status of the CAN bus, as well as the status of the internal diagnostics.

CANopen Communication Profile DS301 V4.02

Among others, the following functionality is integrated. Class C2 functionality:

- NMT Slave
- Heartbeat Protocol
- Identity Object
- Error Behaviour Object
- Variable PDO Mapping self-start programmable (Power on to operational), 3 Sending PDO's
- Node address, baud rate and CANbus / Programmable termination

CANopen Encoder Profile DS406 V3.2

The following parameters can be programmed:

- Event mode
- 1 work area with upper and lower limit and the corresponding output states
- Variable PDO mapping for position, speed, work area status
- Extended failure management for position sensing
- User interface with visual display of bus and failure status 1 LED two colours
- Customer-specific memory - 16 Bytes
- Customer-specific protocol

"Watchdog controlled" device

LSS Layer Setting Services DS305 V2.0

- Global support of Node-ID and baud rate
- Selective protocol via identity object (1018h)

CAN bus connection

The CANopen encoders are equipped with a Bus trunk line in various lengths and can be terminated in the device.

The devices do not have an integrated T-coupler nor they are looped internally and must therefore only be used as end devices.

If possible, drop lines should be avoided, as in principle they lead to signal reflections. As a rule the reflections caused by the drop lines are not critical, if they have completely decayed before the point in time when the scanning occurs.

The sum of all the drop lines should not, for a particular baud rate, exceed the maximum length L_u .

$L_u < 5$ m cable length for 125 Kbit

$L_u < 2$ m cable length for 250 Kbit

$L_u < 1$ m cable length for 1 Mbit

When used as a drop line, the termination resistor should not be activated.

For a network with 3 encoders and 250 Kbit the maximum length of the drop line/encoder must not exceed 70 cm.

Terminal assignment


Signal:	+U _B	0 V	CAN GND	CAN High	CAN Low
Cable colour:	BN	WH	GY	GN	YE

Absolute Encoders – Multiturn



Compact, optical	Sendix F3668 / F3688 (Shaft / Hollow shaft)	CANopen
-------------------------	--	----------------

Dimensions shaft version:

Synchro flange, ø 36 mm

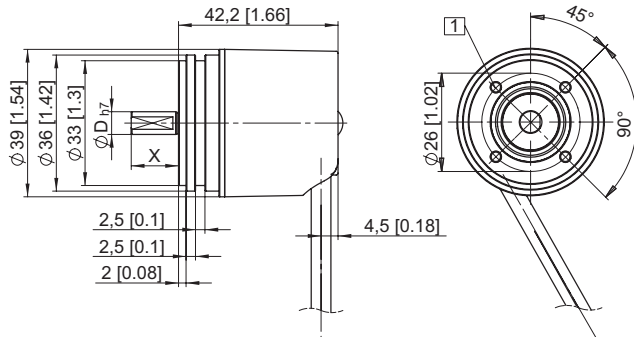

Clamping flange, ø 36 mm

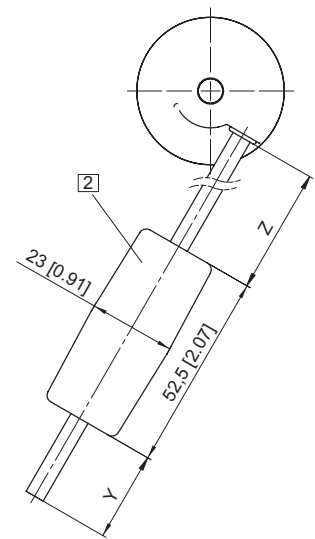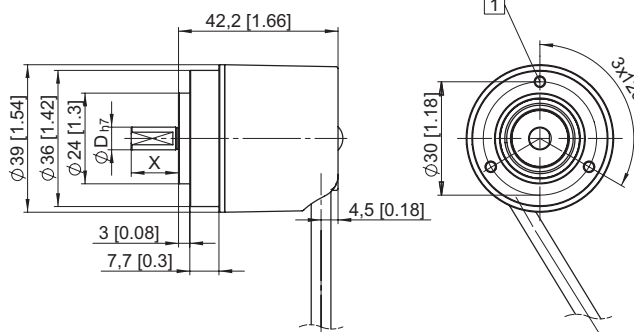



- 1 M3, 6 [0.24] deep
- 2 Battery (in the cable)

Y	Z
1 m	150 mm
5 m	150 mm

Dimensions hollow shaft version:

With torque stop, short, ø 36 mm


(Long torque stop version is shown dashed)

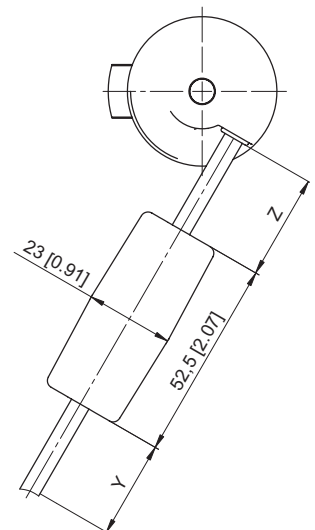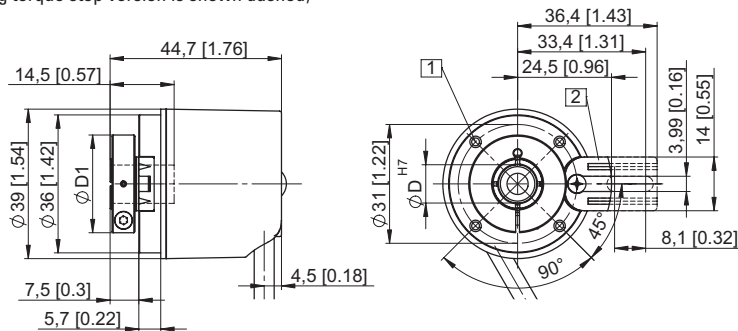

- 1 M2.5 [0.2] deep
- 2 Torque stop slot
Recommendation:
cylindrical pin DIN 7, ø 4 mm
- 3 Battery (in the cable)

Hollow shaft acc. to order code	D1
1	ø 24 mm
2	ø 24 mm
3	ø 25.5 mm
4	ø 25.5 mm

With stator coupling, ø 36 mm

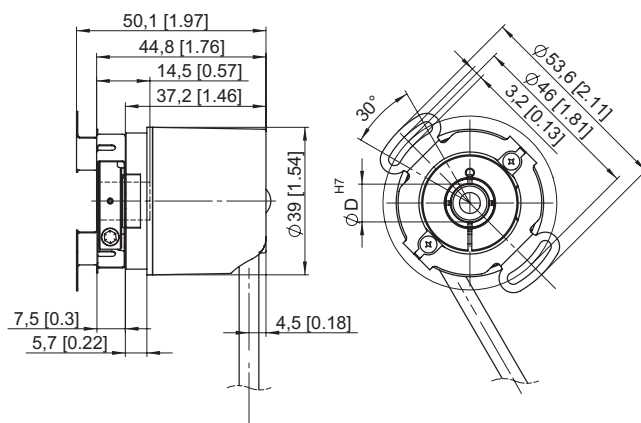

- 1 M2.5 [0.2] deep
- 2 Torque stop slot
Recommendation:
cylindrical pin DIN 7, ø 4 mm
- 3 Battery (in the cable)

Y	Z
1 m	150 mm
5 m	150 mm

Insertion depth for blind hollow shaft 14,5 mm