

STS Series




TAB/Square 1-Phase

- 2 - 6Amp 250V
- Excellent Filtering for Normal Mode and common mode Noise
- Low Leakage
- TAB Terminals
- Suitable for Personal Computers & Peripherals, OA & FA Equipments, Industrial & Digital Equipments, etc.

SPECIFICATIONS

Item	UF2STS	UF3STS	UF6STS	Unit
RATED CURRENT	2	3	6	A
RATED VOLTAGE	250 Max			V
TEST VOLTAGE	2,500Vrms between line and earth for 1 minute			/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth			/
LEAKAGE CURRENT	0.5 Max			mA
TEMPERATURE RISE	30 Max			°C
OPERATING TEMPERATURE	-25 ~ +85			°C
APPROVALS				/

BLOCK DIAGRAM

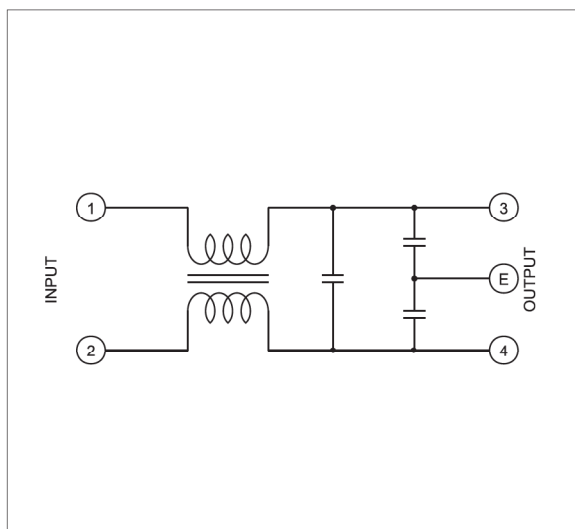

DIMENSIONS(UNITS : MM)

