

ST45MB

Ø45mm

전구 점등/점멸형 타워램프 Bulb Steady/Flashing Tower Lamp

ST45MB | 전구 점등형
Bulb Steady


ST45MBF | 전구 점등/점멸형
Bulb Steady/Flashing

ST45MB-BZ | 부저내장 전구 점등형
Bulb Steady With Buzzer


ST45MBF-BZ | 부저내장 전구 점등/점멸형
Bulb Steady/Flashing With Buzzer



부저내장형 몸체입니다.
The body of this product has buzzer built-in.

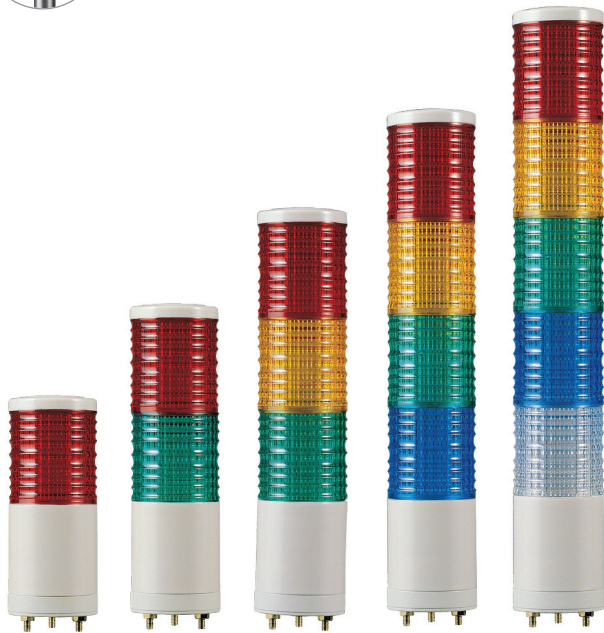

외형도 (External view drawing)

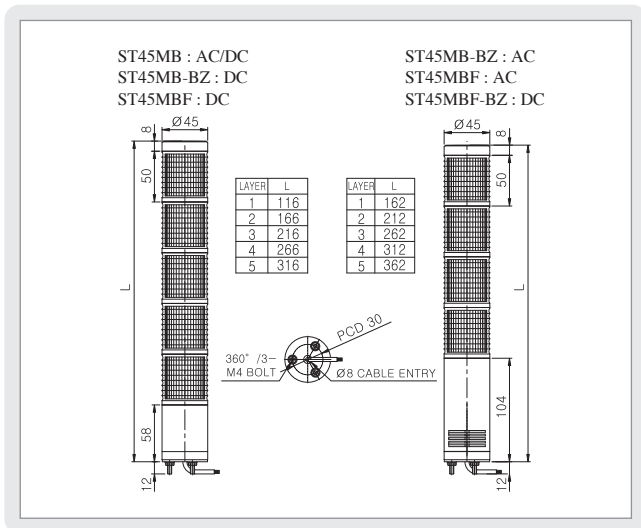

결선도 (Connection Diagram)

· 결선도(Connection Diagram)는 page 128을 참조하십시오.
For a connection diagram, please refer to page 128.



소형으로 부저음 출력과 점멸 동작이 가능한 직부형

- 설치 높이가 제한된 장소나 기기에 적합한 범용 직부형 제품
- 특수 산광 그로브를 채택하여 시인성을 향상
- 내구력이 우수한 장수명 전구 사용
- 점멸수 : 60~80/min.
- 부저내장형 음량 : Max.90dB/m *2음 부저형은 주문 제작
- 재질 : 그로브-AS, 몸체-ABS
- 기술 인증 : CE · 보호 등급 : IP23(부저형), IP44(일반형)

- Common-use product of self-standing type which is suitable for a place or machine that is limited in installation height.
- High in visibility with the special light diffusion globe
- Using bulb with high durability and long self-life
- Flashes : 60-80/min.
- Built-in buzzer type volume : Max.90dB/m
- Material : Lens-AS, Body-ABS
- Certificate : CE
- Protection class : IP23(Buzzer Type), IP44(Without Buzzer)

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	전구 Bulb	중량 Weight	색상 Color
ST45MB 전구점등 Steady	1	AC/DC12V	0.398A	12V5W G14 9S	0.14Kg	적-R
		AC/DC24V	0.212A	24V5W G14 9S	0.14Kg	
		AC110V	0.048A	110V5W T16x28 9S	0.14Kg	
		AC220V	0.023A	220V5W T16x28 9S	0.14Kg	
ST45MBF 전구 점등/점멸 Steady /Flashing	2	AC/DC12V	0.797A	12V5W G14 9S	0.20Kg	적-R 녹-G
		AC/DC24V	0.424A	24V5W G14 9S	0.20Kg	
		AC110V	0.097A	110V5W T16x28 9S	0.20Kg	
		AC220V	0.046A	220V5W T16x28 9S	0.20Kg	
ST45MB- BZ 전구 점등부저 Steady with Buzzer	3	AC/DC12V	1.196A	12V5W G14 9S	0.26Kg	적-R 황-A 녹-G
		AC/DC24V	0.636A	24V5W G14 9S	0.26Kg	
		AC110V	0.146A	110V5W T16x28 9S	0.26Kg	
		AC220V	0.070A	220V5W T16x28 9S	0.26Kg	
ST45MBF -BZ 전구 점등/점멸 부저 Steady /Flashing with Buzzer	4	AC/DC12V	1.595A	12V5W G14 9S	0.32Kg	적-R 황-A 녹-G 청-B
		AC/DC24V	0.848A	24V5W G14 9S	0.32Kg	
		AC110V	0.195A	110V5W T16x28 9S	0.32Kg	
		AC220V	0.093A	220V5W T16x28 9S	0.32Kg	
	5	AC/DC12V	1.994A	12V5W G14 9S	0.38Kg	적-R 황-A 녹-G 청-B 백-W
		AC/DC24V	1.061A	24V5W G14 9S	0.38Kg	
		AC110V	0.244A	110V5W T16x28 9S	0.38Kg	
		AC220V	0.116A	220V5W T16x28 9S	0.38Kg	

신호선 전류 및 점점용량 (1단 기준)

(Signal Line Current & Contact Capacity-1Layer)

전압 Rated Voltage	신호선 전류 Signal Line Current	돌입전류 Rush Current	외부접점용량 External Contact Capacity	부저선 전류 Buzzer Line Current
AC/DC12V	0.357A	Abt.4.8A	Over 5A	0.015A
AC/DC24V	0.185A	Abt.2.4A	Over 3A	0.028A
AC110V	0.042A	Abt.0.6A	Over 1A	0.021A
AC220V	0.021A	Abt.0.4A	Over 1A	0.038A

ST45MB SERIES 사양지정(Order Specification)

형식(Model)	단수(Layer)	전압(Voltage)	색상(Color)
· ST45MB	· 1-1단	· 12-DC12V	· R-적(Red)
· ST45MB-BZ	· 2-2단	· 24-DC24V	· A-황(Amber)
· ST45MBF	· 3-3단	· 110-AC110V	· G-녹(Green)
· ST45MBF-BZ	· 4-4단	· 220-AC220V	· B-청(Blue)
	· 5-5단		· W-백(White)

※ 렌즈 색상은 사용자가 임의로 배열할 수 있습니다.
※ Product user may select the combination of colors.