

# ST56C

Ø56mm

LED 전구 점등/점멸형 타워램프(POLE 취부형)  
LED Bulb Steady/Flashing Tower light(POLE Mounting)

**ST56C** | LED 점등형  
LED Steady

**ST56CF** | LED 점등/점멸형  
LED Steady/Flashing

**ST56C-BZ** | 부저내장 LED 점등형  
LED Steady With Buzzer

**ST56CF-BZ** | 부저내장 LED 점등/점멸형  
LED Steady /Flashing With Buzzer



## LED 전구를 적용한 경제형 타워램프

Common use LED Signal tower prepare LED long-life and Bulb Economic

- 외경 56mm POLE 취부형
- 필라멘트 전구구조에 LED 전구를 적용하여 경제성 향상
- LED 전구를 광원으로 사용하는 경제형 구조
- 각 단별 렌즈 색상 자유롭게 이동 배열 가능
- 고휘도 LED와 확산 렌즈 구조를 채택하여 시인성이 우수
- 필라멘트 전구형 보다 명료하고 밝은 신호 빛 발산
- 설치 환경에 적합한 구조의 다양한 취부대 선정
- 점멸수 : 60~80/min.
- 재질 : 그로브-AS, 몸체-ABS, Pole-알루미늄
- 보호등급 : IP23(부저형), IP44(일반형)

- Pole Mounting type of 56mm diameter
- Combine of Bulb type Economic merit and LED long life
- Provide more economical merit using LED light source
- Make easy changing lens color for layer and maintenance
- Employing high brightness LED and special diffusion lens
- Provide strong light and high brightness when compare with filament bulb
- Select the appropriate mounting option for installation environment
- Flashes : 60~80/min
- Material : Lens-AS, Body-ABS, Pole-Al
- Protection rate : IP23(Buzzer type), IP44(without buzzer)



부저내장형 몸체입니다.  
The body of this product has buzzer built-in.



### 전구형 타워램프 LED 전구로 대체

필라멘트 전구를 사용하던 기존의 전구 광원 타워램프는 당사의 LED 전구를 이용하여 LED형으로 전환할 수 있습니다.

### Changed LED bulb replacement of filament bulb

Easy changing LED type signal tower light using only LED bulb in replacement of filament bulb signal tower light


취부대 (Bracket) Mounting device

SCREW & NUT LB 18 LW 18 SZ 18 SL 18

※ 상세한 치수사양은 Page 13 를 참조하십시오.  
For a detailed dimension, please refer to page 13.

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
ST56C LED점등 Steady	1	AC/DC12V	0.08A	0.30kg	적-R
		AC/DC24V	0.04A	0.30kg	
		AC110V	0.02A	0.30kg	
ST56CF LED 점등/점멸 Steady Flashing	2	AC220V	0.02A	0.30kg	적-R 녹-G
		AC/DC12V	0.16A	0.35kg	
		AC/DC24V	0.08A	0.35kg	
ST56C-BZ LED 점등부저 Steady with Buzzer	3	AC110V	0.06A	0.41kg	적-R 황-A 녹-G
		AC220V	0.06A	0.41kg	
		AC/DC12V	0.32A	0.47kg	
ST56C-BZ LED 점등점멸 부저 Steady /Flashing with Buzzer	4	AC/DC24V	0.16A	0.47kg	적-R 황-A 녹-G 청-B
		AC110V	0.08A	0.47kg	
		AC220V	0.08A	0.47kg	
		AC/DC12V	0.40A	0.53kg	
	5	AC/DC24V	0.20A	0.53kg	적-R 황-A 녹-G 청-B 백-W
		AC110V	0.10A	0.53kg	
		AC220V	0.10A	0.53kg	

## 외형도 (External view drawing)

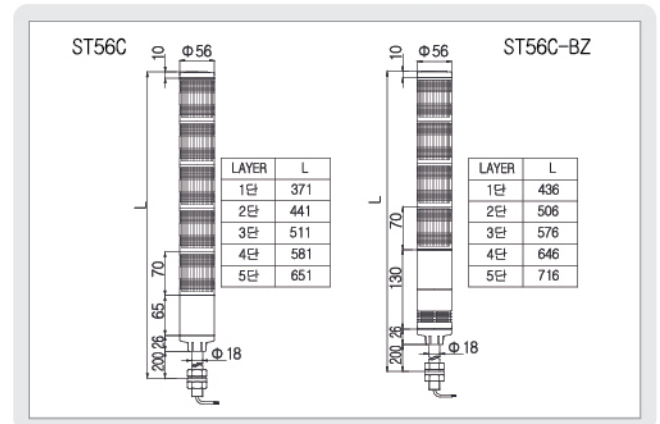

## ST56C SERIES 사양지정 (Order Specification)

형식 (Model)	단수 (Layer)	전압 (Voltage)	색상 (Color)	취부대 (Bracket)
ST56C	· 1-1단	· 12-DC12V	■ R-적 (Red)	· 무지정 (None)
ST56C-BZ	· 2-2단	· 24-DC24V	■ A-황 (Amber)	Standard
ST56CF	· 3-3단	· 110-AC110V	■ G-녹 (Green)	· 지정 (Bracket)
ST56CF-BZ	· 4-4단 · 5-5단	· 220-AC220V	■ B-청 (Blue)	LB18
			■ W-백 (White)	LW18 SZ18 SL18