


Position and Frequency display *CODIX 54P*

separate inputs for frequency and position

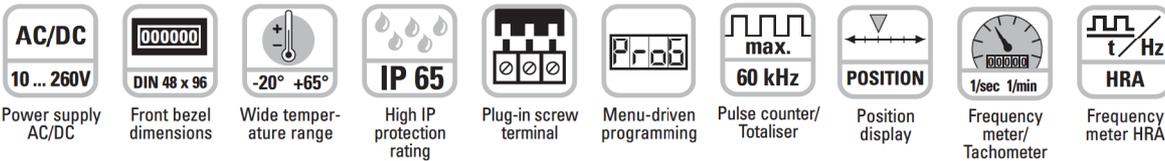

Powerful

- **Fast count input**
Input frequency max. 60 kHz
- **Robust housing**
IP 65 protection
- **LED display**
Very bright, 14 mm high
- **HRA – High Rate Accuracy System**
Frequencies up to 38 Hz are calculated using time-interval (period duration) measurement.
Frequencies > 38 Hz are calculated using a special time base (gate time) measurement. A very high accuracy of > 0.1% is achieved, even with very short gate times. The resulting measurement is available after a max. of 50 ms.
- **Fast start-up time**
Detects incoming pulses just 16 ms after being switched on – so no pulses are lost with a simultaneous motor start-up



User-friendly

- **Big keys**
Can also be operated when using gloves
- **Easy to programme**
Easy menu-driven programming and operation
Possibility to enter the programming mode during operation, with authentication query
Pressing the right key switches between displays

Universal

- **Individually programmable scaling**
Multiplication and division factor (0.0001 to 99.9999), to display corresponding engineering units, e.g. position in 1/10 mm and speed in RPM.
- **Separate factors and inputs for frequency- and pulse counting**
- **4 different count input modes for the position display**
2-channel input for detecting count direction, difference or adding mode, quadrature x1, x2 or x4. 1 separate input for rotary speed and speed, display in 1/min or 1/sec
- **AC or DC power supply**
With sensor power supply
- **Inputs**
As an alternative to the HTL inputs, devices with a 5 VDC input trigger level are available, for use as parallel displays for PLCs


Applications for Frequency and Position Display/ Totaliser

Position and rotary speed applications, e.g.


- OEM equipment or retrofitting to drilling machines
- OEM equipment on flow measuring plant, e.g. total flow and current flow

- Total piece count and pieces per minute, where the pulse counting occurs in the add/subtract mode, in order to deduct reject parts


- Production data acquisition: total piece count and production speed, or absolute distance traversed and current speed



Rotary speed and drilling depth

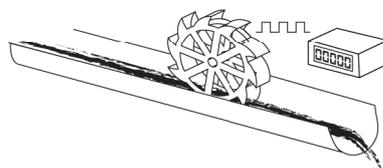

Flow rate and total volume

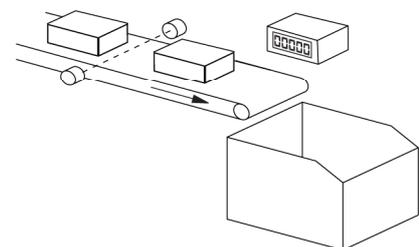


Piece count on conveyor and production speed

Position and Frequency display **CODIX 54P**


Technical data:

Supply voltage:	10 ... 30 V DC, with reverse polarity protection 90 ... 260 V AC	AC-version:	Low 0 ... 4 V DC High 12 ... 30 V DC
Current consumption:	max. 50 mA, 6 VA	Input switching level (5 V version):	Low 0 ... 2 V DC High 4 ... 30 V DC
Display:	6-digit 7-segment red LED display; 14 mm [0.551"] high	Accuracy:	<0.1 % (Frequency display/Rate meter)
Data backup:	EEPROM	Voltage supply for sensors:	24 V DC \pm 15 %/100 mA at AC version
Housing:	Dimension 96 x 48 mm [3.78 x 1.89"] according to DIN 43 700; RAL 7021, grey	Ambient temperature:	-20 ... +65 °C [-4 ... 149 °F] non-condensing
Polarity of Inputs:	programmable, npn or pnp for all inputs	Storage temperature:	-25 ... +70 °C [-13 ... 158 °F]
Input resistance:	approx. 5 k Ω	EMC:	according to EC EMC directive 89/36/EWG
Counting frequency*:	30 kHz, can be damped to 30 Hz depending on operating mode	Emitted interference:	EN 61000-6-4/EN 55011 class B
Reset time:	5 ms	Immunity to interference:	EN 61000-6-2
Input switching level (standard version):	DC-version: Low: 0 ... 0.2 [0 ... 0.008"] x U _B [V DC] High: 0.6 [0.024"] x U _B ... 30 V DC	Protection:	IP65 from front
		Weight:	approx. 150 g [5.291 oz]

Block diagram:

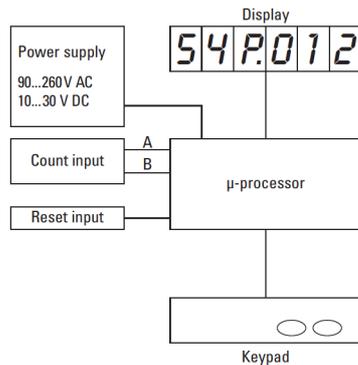


*for further specifications please refer to the manual

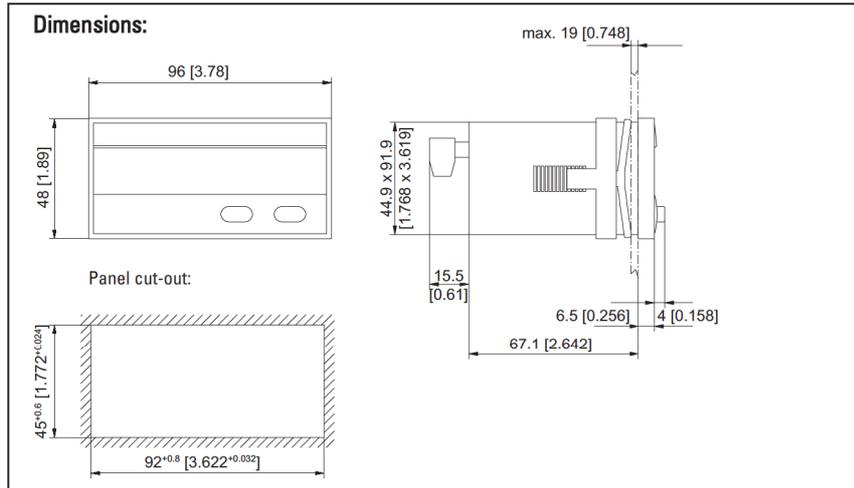


Order code:

6.54P.012.XX0

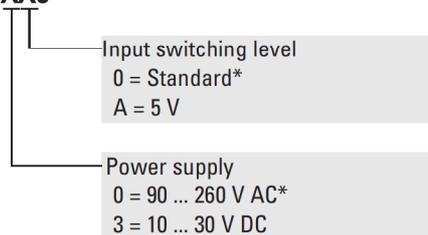

* standard stock model

Connections:

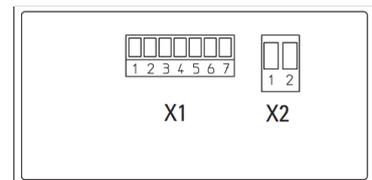

Connection: X2

Pin	AC-version	DC-version
1	90 ... 260 V AC	0 V DC (GND)
2	90 ... 260 V AC	10 ... 30 V DC

Connection: X1

Pin	AC-Version	DC-Version
1	n.c.	
2	n.c.	
3	INP C (Frequency)	
4	INP B (Count)	
5	INP A (Count)	
6	GNDout	n.c.
7	+24 Vout	n.c.

Delivery specification:

- Digital display
- Mounting clip
- Seal
- Multilingual operating instructions