

# SBS Series(3)




## BOLT/Square 1-Phase

- 40 - 50Amp 250V
- Excellent Filtering for Normal Mode and common Mode Noise
- Low Leakage
- Bolt Terminals
- Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.
- Approved by EN60939-2  $\triangle$

### SPECIFICATIONS

Item	UF40SBS	UF50SBS	Unit
RATED CURRENT	40	50	A
RATED VOLTAGE	250 Max		V
TEST VOLTAGE	2,500Vrms between line and earth for 1 minute		/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth		/
LEAKAGE CURRENT	1 Max		mA
TEMPERATURE RISE	30 Max		°C
OPERATING TEMPERATURE	-25 ~ +85		°C
APPROVALS	TUV	TUV	/

### BLOCK DIAGRAM

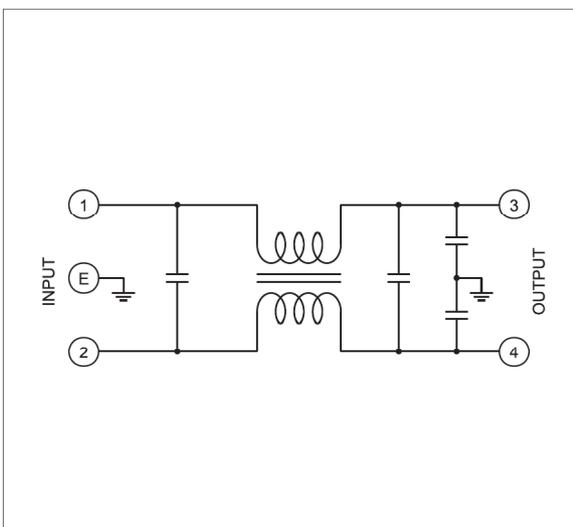

### DIMENSIONS(UNITS : MM)

