

TBL Series(2)




BOLT/Low-volt 3-Phase

- **20Amp 250V**
- **Excellent Filtering for Normal Mode and common Mode Noise**
- **Low Leakage**
- **Bolt Terminals**
- **Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.**
- **Approved by EN60939-2 Δ**

SPECIFICATIONS

Item	UF20TBL	Unit
RATED CURRENT	20	A
RATED VOLTAGE	250 Max	V
TEST VOLTAGE	1,500Vrms between line and earth for 1 minute	/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth	/
LEAKAGE CURRENT	1 Max	mA
TEMPERATURE RISE	40 Max	°C
OPERATING TEMPERATURE	-25 ~ +85	°C
APPROVALS	TUV	/

BLOCK DIAGRAM

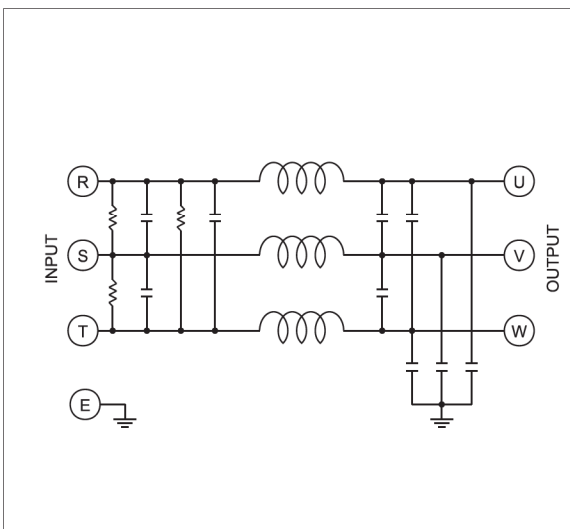

DIMENSIONS(UNITS : MM)

