

TBH Series(3)




BOLT/High-volt 3-Phase

- 50 - 120Amp 450V
- Excellent Filtering for Normal Mode and common Mode Noise
- Low Leakage
- Bolt Terminals
- Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.
- Approved by EN60939-2 \triangle

SPECIFICATIONS

| Item | UF50TBH | UF60TBH | UF80TBH | UF100TBH | UF120TBH | Unit |
|-----------------------|---|---------|---------|----------|----------|------|
| RATED CURRENT | 50 | 60 | 80 | 100 | 120 | A |
| RATED VOLTAGE | 450 Max | | | | | V |
| TEST VOLTAGE | 1,500Vrms between line and earth for 1 minute | | | | | / |
| ISOLATION RESISTANCE | 500Vdc 300Mohm between line and earth | | | | | / |
| LEAKAGE CURRENT | 1 Max | | | | | mA |
| TEMPERATURE RISE | 40 Max | | | | | °C |
| OPERATING TEMPERATURE | -25 ~ +85 | | | | | °C |
| APPROVALS | TUV | TUV | TUV | TUV | TUV | / |

BLOCK DIAGRAM

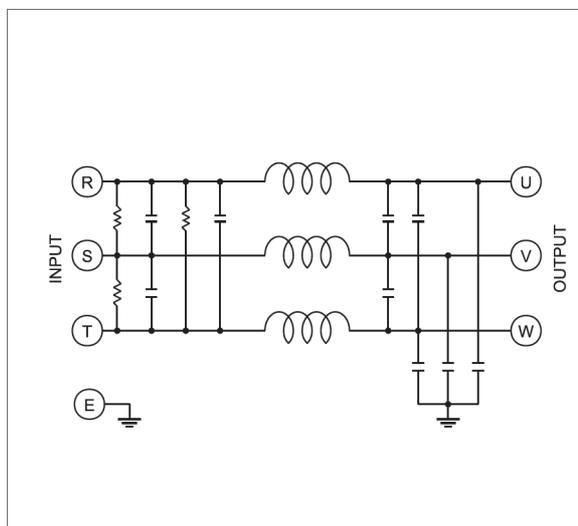

DIMENSIONS(UNITS : MM)

