

# STC56(M)L

Ø56mm

다색 1단 LED 타워등 Multiple Colors 1 Layer LED Tower Light



## 1단 타워등으로 2~3색의 LED 신호를 전달하는 Ø56mm 타워램프

- STC56L** | LED 점등형 LED Steady
- STC56LF** | LED 점등/점멸형 LED Steady/Flashing
- STC56L-BZ** | 부저내장 LED 점등형 LED Steady With Buzzer
- STC56LF-BZ** | 부저내장 LED 점등/점멸형 LED Steady/Flashing With Buzzer

- STC56ML** | LED 점등형 LED Steady
- STC56MLF** | LED 점등/점멸형 LED Steady/Flashing
- STC56ML-BZ** | 부저내장 LED 점등형 LED Steady With Buzzer
- STC56MLF-BZ** | 부저내장 LED 점등/점멸형 LED Steady/Flashing With Buzzer



부저내장형 몸체입니다.  
The body of this product has buzzer built-in.




형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
STC56L	2	AC/DC12V	0.277A	0.56Kg	적-R 녹-G
STC56LF	2	AC/DC24V	0.188A	0.56Kg	적-R 녹-G
STC56L-BZ	3	AC110V	0.057A	0.67Kg	적-R 황-A 녹-G
STC56LF-BZ	3	AC220V	0.028A	0.67Kg	적-R 황-A 녹-G

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
STC56ML	2	AC/DC12V	0.277A	0.44Kg	적-R 녹-G
STC56MLF		AC/DC24V	0.188A	0.44Kg	적-R 녹-G
STC56ML-BZ	3	AC110V	0.057A	0.55Kg	적-R 황-A 녹-G
STC56MLF-BZ		AC220V	0.028A	0.55Kg	적-R 황-A 녹-G


형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
STC56L	2	AC/DC12V	0.277A	0.56Kg	적-R 녹-G
STC56LF		AC/DC24V	0.188A	0.56Kg	적-R 녹-G
STC56L-BZ	3	AC110V	0.057A	0.67Kg	적-R 황-A 녹-G
STC56LF-BZ		AC220V	0.028A	0.67Kg	적-R 황-A 녹-G

※ 표준 색상 이외의 조합은 사용자가 주문시 지정 가능합니다.  
※ Product user may select the combination of colors

### 외형도 (External view drawing)

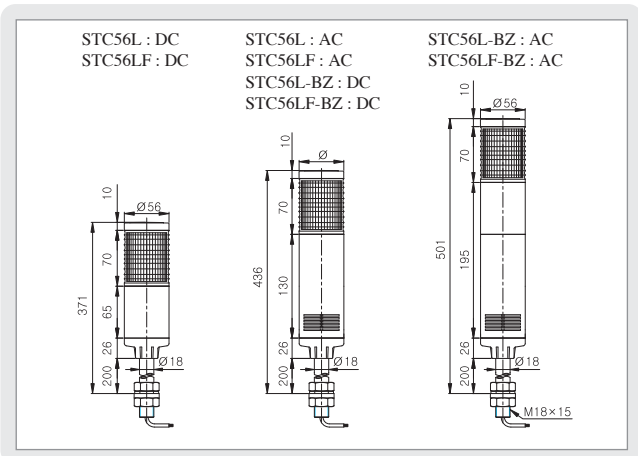

### 외형도 (External view drawing)

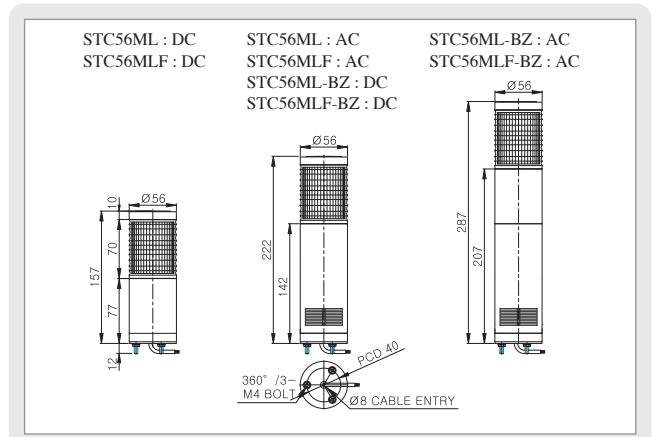

### 결선도 (Connection Diagram)

- 외부 점접을 이용한 결선도는 Page160을, 트랜지스터(I/O유닛)를 이용한 결선도는 Page13을 참조하시기 바랍니다.
- Refer to page 160 for wiring by using external contact point and refer to page 13 for wiring by using transistor(I/O unit)

### STC56(M)L SERIES 사양지정(Order Specification)

형식(Model)	색수(No. of Color)	전압(Voltage)	색상(Color)
STC56L	3	220	RAG
STC56(M)L	2-2 색	12-DC12V	적-R (Red)
STC56(M)LF	3-3 색	24-DC24V	황-A (Amber)
STC56(M)L-BZ		110-AC110V	녹-G (Green)
STC56(M)LF-BZ		220-AC220V	