

STC80(M)L

Ø80mm

다색 1단 LED 타워등 Multiple Colors 1 Layer LED Tower Light



1단 타워등으로 2~3색의 LED 신호를 전달하는 Ø80mm 대형 타워램프

- STC80L** | LED 점등형
LED Steady
- STC80LF** | LED 점등/점멸형
LED Steady/Flashing
- STC80L-BZ** | 부저내장 LED 점등형
LED Steady With Buzzer
- STC80LF-BZ** | 부저내장 LED 점등/점멸형
LED Steady/Flashing With Buzzer

- STC80ML** | LED 점등형
LED Steady
- STC80MLF** | LED 점등/점멸형
LED Steady/Flashing
- STC80ML-BZ** | 부저내장 LED 점등형
LED Steady With Buzzer
- STC80MLF-BZ** | 부저내장 LED 점등/점멸형
LED Steady/Flashing With Buzzer



부저내장형 몸체입니다.
The body of this product has buzzer built-in.



취부대 (Bracket) Mounting device

SCREW & NUT (표준: Standard)	LB24	LW24	SZ24	SL24


※ 상세한 치수사양은 Page 129를 참조하십시오.
For a detailed dimension, please refer to page 129.

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
STC80ML LED 점등 LED Steady	2	AC/DC12V	0.333A	0.62Kg	■ 적-R
		AC/DC24V	0.277A	0.62Kg	■ 녹-G
STC80MLF LED 점등/점멸 LED Steady/Flashing	2	AC/DC12V	0.333A	0.62Kg	■ 적-R
		AC/DC24V	0.277A	0.62Kg	■ 녹-G
STC80ML-BZ 부저내장 LED 점등 LED Steady With Buzzer	3	AC110V	0.073A	0.75Kg	■ 적-R
		AC220V	0.036A	0.75Kg	■ 황-A ■ 녹-G


형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
STC80L LED 점등 LED Steady	2	AC/DC12V	0.333A	0.73Kg	■ 적-R
STC80LF LED 점등/점멸 LED Steady/Flashing		AC/DC24V	0.277A	0.73Kg	■ 녹-G
STC80L-BZ 부저내장 LED 점등 LED Steady With Buzzer	3	AC110V	0.073A	0.86Kg	■ 적-R
STC80LF-BZ 부저내장 LED 점등/점멸 LED Steady/Flashing With Buzzer		AC220V	0.036A	0.86Kg	■ 황-A ■ 녹-G

※ 표준 색상 이외의 조합은 사용자가 주문시 지정 가능합니다.
※ Product user may select the combination of colors

외형도 (External view drawing)

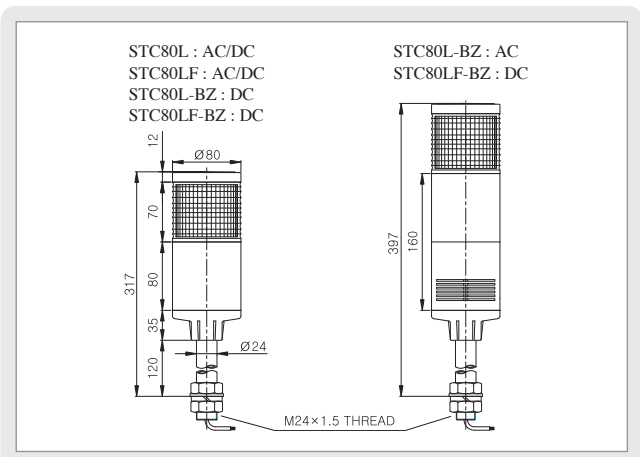

외형도 (External view drawing)

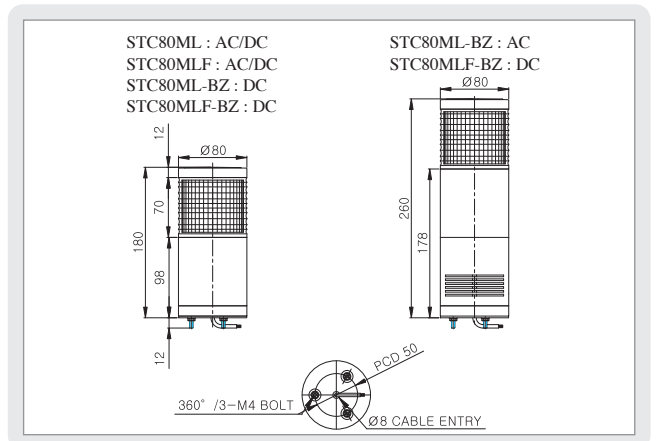

결선도 (Connection Diagram)

- 외부 점접을 이용한 결선도는 Page160을, 트랜지스터(I/O유닛)를 이용한 결선도는 Page13을 참조하십시오.
- Refer to page 160 for wiring by using external contact point and refer to page 13 for wiring by using transistor(I/O unit)

STC80(M)L SERIES 사양지정(Order Specification)

형식(Model)	색수(No. of Color)	전압(Voltage)	색상(Color)
STC80L	3	24	RAG
· STC80(M)L	· 2-2 색	· 12-DC12V	■ R-적(Red)
· STC80(M)LF	· 3-3 색	· 24-DC24V	■ A-황(Amber)
· STC80(M)L-BZ		· 110-AC110V	■ G-녹(Green)
· STC80(M)LF-BZ		· 220-AC220V	