

S100D

SERIES LENS Ø100mm - 105dB

신호음 내장 경고등/표시등
Warning/Signal Light with Siren



설치기기의 품격을 높여주는 신제품

전용기, 로봇생산라인, 무인감시시스템의 원격신호전달용으로 적합


- 자립형 신호음 내장 제품
- 본사만의 독특한 폰내장 구조를 채택, 동종업체 유사품 중 가장 작은 외형으로 다양한 기능을 발휘
- 전용기, 로봇생산라인, 무인감시 시스템의 시청각 신호전달에 적합
- 전구, 고휘도 LED, 크세논램프 중 용도에 가장 적합한 광원 선택
- 그로브 색상 : ■적-R ■황-A ■녹-G ■청-B
- 재질 : 그로브-AS, 몸체-ABS • 기술 인증 : CE
- 보호 등급 : IP54, 옥외설치 가능

- Signal sound built-in product of self-standing type
- Smaller than any other similar products of rivals and having a variety of functions by employing this company's own unique built-in horn structure
- Suitable to transmit audible-visual signal for machines of exclusive use, robotized production lines and manless surveillance systems
- Users can select the best suitable light source among bulb, high brightness LED and xenon lamp.
- Lens color : ■ R ■ A ■ G ■ B
- Material : Lens-AS, Body-ABS • Certificate : CE
- Protection class : IP54, outdoor installation possible


형식 Model	내장음 Built-in sound	음량 dB/m (Max)	전압 Rated Voltage	색상 Color	중량 Weight
S100D 전구반사경회전형 Bulb Revolving Light	WS 경고음 5음 5 Warning sounds	105dB	· DC 12V · DC 24V · AC 110V · AC 220V	■ 적-R ■ 황-A ■ 녹-G ■ 청-B	S100D DC-1.05Kg AC-1.44Kg
S100DLR LED 반사경회전형 LED Revolving Light	WM 멜로디 5음 5 Melodies	105dB			S100DLR DC-1.17Kg AC-1.42Kg
S100DL LED 점등/점멸형 LED Steady/Flashing Light	WA 알람 5음 5 Alarms	103dB			S100DL DC-0.97Kg AC-1.38Kg
S100DS 크세논램프 스트로브형 Xenon Lamp Strobe Light	WV 음성신호 3채널 3 Voice signals	95dB			S100DS DC-0.94Kg AC-1.32Kg

※ 표시등부의 상세사양은 page 45~50 S100 Series를, 음색에 대한 상세사양은 page 8~9 를 참고하십시오.

※ For detailed specification
- signal light : see S100 series in page 45~50.
- sound tone : see page 8~9.

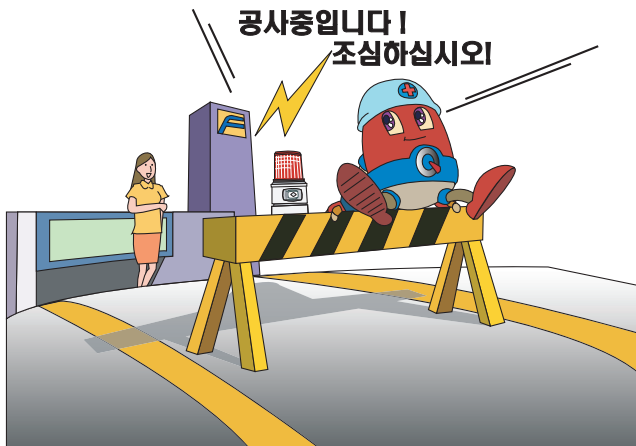


결선도 (Connection Diagram)

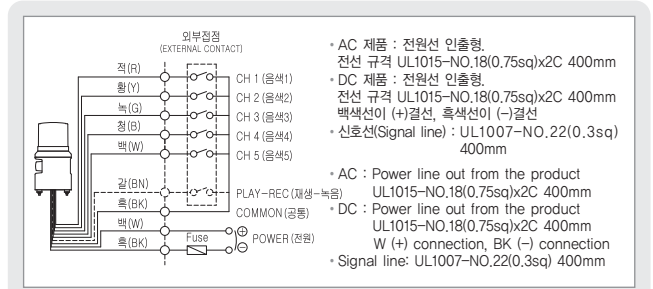

- 표준제품은 음색 신호선이 인출됩니다. 신호선을 외부접점에 연결하여 원하는 음색을 선택하십시오.
- 외부접점을 이용한 결선도는 상기 결선도를, 트랜지스터(I/O유닛)를 이용한 결선도는 Page13을 참조하시기 바랍니다.

- In case of standard product, signal sound tone line can be drawn out. Select sound tone by connecting signal line to outside contact.
- Refer to above diagram for wiring by using external contact point and refer to page 13 for wiring by using transistor(I/O unit)

외형도 (External view drawing)

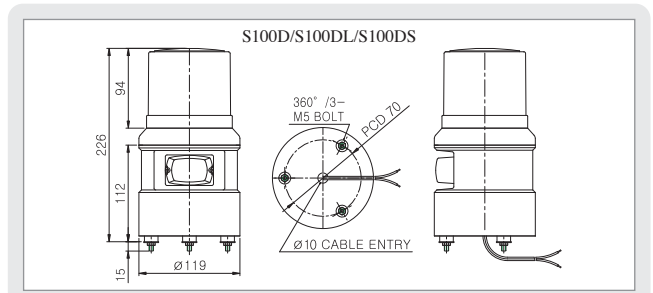

S100D SERIES 사양지정(Order Specification)

S100D	- WA	- 220	- A
형식(Model)	음색(Sound tone)	전압(Voltage)	색상(Color)
· S100D	· WS(경고음)	· 12-DC12V	■ R-적(Red)
· S100DLR	· WM(멜로디)	· 24-DC24V	■ A-황(Amber)
· S100DL	· WA(알람)	· 110-AC110V	■ G-녹(Green)
· S100DS	· WV(음성)	· 220-AC220V	■ B-청(Blue)