

ST45B

Ø45mm

전구 점등/점멸형 타워램프 Bulb Steady/Flashing Tower Lamp

ST45B | 전구 점등형
Bulb Steady

ST45BF | 전구 점등/점멸형
Bulb Steady/Flashing

ST45B-BZ | 부저내장 전구 점등형
Bulb Steady With Buzzer

ST45BF-BZ | 부저내장 전구 점등/점멸형
Bulb Steady/Flashing With Buzzer



소형으로 부저음 출력과 점멸 동작이 가능한 POLE 취부형

- 특수 산광 그로브를 채택하여 시인성을 향상
- 내구력이 우수한 장수명 전구 사용
- 실용적이고 외관이 미려한 다양한 취부대 이용
- 점멸수 : 60~80/min.
- 부저내장형 음량 : Max.90dB/m *2음 부저형은 주문 제작
- 재질 : 그로브-AS, 몸체-ABS, Pole-알루미늄
- 기술 인증 : CE • 보호 등급 : IP23(부저형), IP44(일반형)

- Enhancing visibility by employing the special light diffusion globe
- Using bulb with high durability and long lifespan
- Using various types of brackets with practicality and brilliant appearance
- Flashes : 60~80/min.
- Built-in buzzer type volume : Max.90dB/m
- Material : Lens-AS, Body-ABS, Pole-Aluminum
- Certificate : CE
- Protection class : IP23(Buzzer Type), IP44(Without Buzzer)



부저내장형 몸체입니다.
The body of this product has buzzer built-in.




취부대 (Bracket) Mounting device

SCREW & NUT (표준: Standard) LB18 LW18 SZ18 SL18

* 상세한 치수사양은 Page 129를 참조하십시오.
For a detailed dimension, please refer to page 129.

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	전구 Bulb	중량 Weight	색상 Color	
ST45B 전구점등 Steady	1	AC/DC12V	0.398A	12V5W	G14 9S	1 0.30Kg	적-R
		AC/DC24V	0.212A	24V5W	G14 9S	2 0.30Kg	
		AC110V	0.048A	110V5W	T16x28 9S	3 0.30Kg	
		AC220V	0.023A	220V5W	T16x28 9S	4 0.30Kg	
ST45BF 전구 점등/점멸 Steady /Flashing	2	AC/DC12V	0.797A	12V5W	G14 9S	1 0.35Kg	적-R 녹-G
		AC/DC24V	0.424A	24V5W	G14 9S	2 0.35Kg	
		AC110V	0.097A	110V5W	T16x28 9S	3 0.35Kg	
		AC220V	0.046A	220V5W	T16x28 9S	4 0.35Kg	
ST45B-BZ 전구 점등부저 Steady with Buzzer	3	AC/DC12V	1.196A	12V5W	G14 9S	1 0.41Kg	적-R 황-A 녹-G
		AC/DC24V	0.636A	24V5W	G14 9S	2 0.41Kg	
		AC110V	0.146A	110V5W	T16x28 9S	3 0.41Kg	
		AC220V	0.070A	220V5W	T16x28 9S	4 0.41Kg	
ST45BF-BZ 전구 점등/점멸 부저 Steady /Flashing with Buzzer	4	AC/DC12V	1.595A	12V5W	G14 9S	1 0.47Kg	적-R 황-A 녹-G 청-B
		AC/DC24V	0.848A	24V5W	G14 9S	2 0.47Kg	
		AC110V	0.195A	110V5W	T16x28 9S	3 0.47Kg	
		AC220V	0.093A	220V5W	T16x28 9S	4 0.47Kg	
	5	AC/DC12V	1.994A	12V5W	G14 9S	1 0.53Kg	적-R 황-A 녹-G 청-B 백-W
		AC/DC24V	1.061A	24V5W	G14 9S	2 0.53Kg	
		AC110V	0.244A	110V5W	T16x28 9S	3 0.53Kg	
		AC220V	0.116A	220V5W	T16x28 9S	4 0.53Kg	

외형도 (External view drawing)

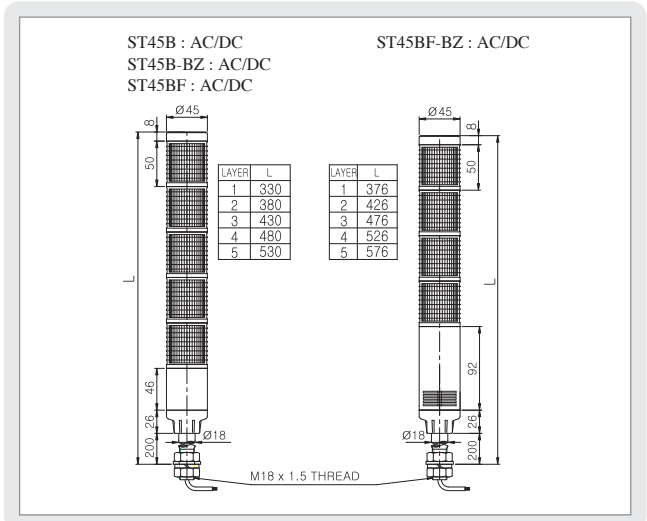

결선도 (Connection Diagram)

• 결선도(Connection Diagram)는 page 128을 참조하십시오.
For a connection diagram, please refer to page 128.

ST45B SERIES 사양지정(Order Specification)

ST45BF - 4 - 220 - RAGB - (LW18)

형식(Model)	단수(Layer)	전압(Voltage)	색상(Color)	취부대(Bracket)
· ST45B	· 1-1단	· 12-DC12V	· R-적(Red)	· 무지정(None)
· ST45B-BZ	· 2-2단	· 24-DC24V	· A-황(Amber)	Standard
· ST45BF	· 3-3단	· 110-AC110V	· G-녹(Green)	· 지정(Bracket)
· ST45BF-BZ	· 4-4단	· 220-AC220V	· B-청(Blue)	LB18
	· 5-5단		· W-백(White)	LW18
				SZ18
				SL18

* 렌즈 색상은 사용자가 임의로 배열할 수 있습니다.
* Product user may select the combination of colors.