

ST56MC

Ø56mm

LED 전구 점등/점멸형 타워램프(직부형)
LED Bulb Steady/Flashing Tower light(Direct Mounting)

ST56MC | LED 점등형
LED Steady

ST56MCF | LED 점등/점멸형
LED Steady/Flashing

ST56MC-BZ | 부저내장 LED 점등형
LED Steady With Buzzer

ST56MCF-BZ | 부저내장 LED 점등/점멸형
LED Steady /Flashing With Buzzer



부저내장형 몸체입니다.
The body of this product has buzzer built-in.




LED 전구를 적용한 경제형 타워램프

Common use LED Signal tower prepare LED long-life and Bulb Economic

- 외경 56mm 직부형
- 필라멘트 전구구조에 LED 전구를 적용하여 경제성 향상
- LED 전구를 광원으로 사용하는 경제형 구조
- 각 단별 렌즈 색상 자유롭게 이동 배열 가능
- 고휘도 LED와 확산 렌즈 구조를 채택하여 시인성이 우수
- 필라멘트 전구형 보다 명료하고 밝은 신호 빛 발산
- 점멸수 : 60~80/min.
- 재질 : 그로브-AS, 몸체-ABS, Pole-알루미늄
- 보호등급 : IP23(부저형), IP44(일반형)

- Direct Mounting type of 56mm diameter
- Combine of Bulb type Economic merit and LED long life
- Provide more economical merit using LED light source
- Make easy changing lens color for layer and maintenance
- Employing high brightness LED and special diffusion lens
- Provide strong light and high brightness when compare with filament bulb
- Flashes : 60~80/min
- Material : Lens-AS, Body-ABS, Pole-Al
- Protection rate : IP23(Buzzer type), IP44(without buzzer)


외형도 (External view drawing)

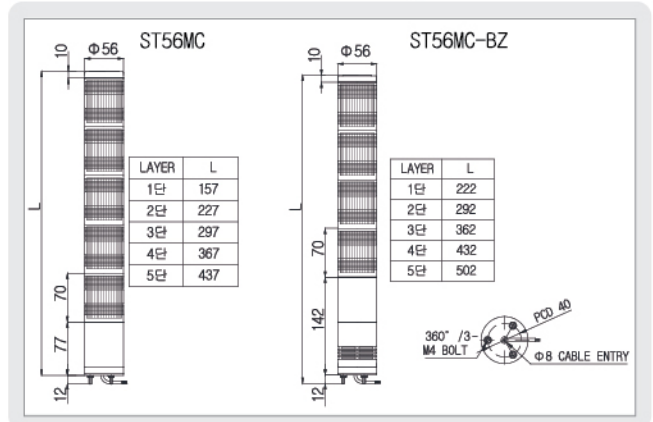

전구형 타워램프 LED 전구로 대체
필라멘트 전구를 사용하던 기존의 전구 광원 타워램프는
당사의 LED 전구를 이용하여 LED형으로 전환할 수 있습니다.

Changed LED bulb replacement of filament bulb
Easy changing LED type signal tower light using only
LED bulb in replacement of filament bulb signal tower light

결선도 (Connection Diagram)

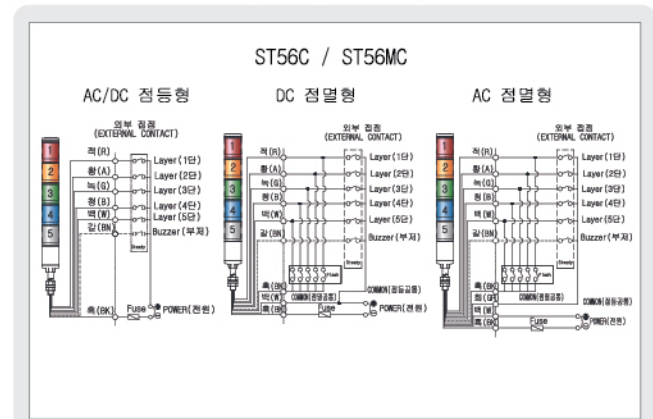

형식 Model	단수 Layer	전압 Rated Voltage	전류 Current	중량 Weight	색상 Color
ST56MC LED점등 Steady	1	AC/DC12V	0.08A	0.14kg	■ 적-R
		AC/DC24V	0.04A	0.14kg	
		AC110V	0.02A	0.14kg	
		AC220V	0.02A	0.14kg	
ST56MCF LED 점등/점멸 Steady Flashing	2	AC/DC12V	0.16A	0.20kg	■ 적-R ■ 녹-G
		AC/DC24V	0.08A	0.20kg	
		AC220V	0.04A	0.20kg	
ST56MC-BZ LED 점등부저 Steady with Buzzer	3	AC/DC12V	0.24A	0.26kg	■ 적-R ■ 황-A ■ 녹-G
		AC/DC24V	0.12A	0.26kg	
		AC110V	0.06A	0.26kg	
		AC220V	0.06A	0.26kg	
ST56MC-BZ LED 점등점멸 부저 Steady /Flashing with Buzzer	4	AC/DC12V	0.32A	0.32kg	■ 적-R ■ 황-A ■ 녹-G ■ 청-B
		AC/DC24V	0.16A	0.32kg	
		AC110V	0.08A	0.32kg	
		AC220V	0.08A	0.32kg	
	5	AC/DC12V	0.40A	0.38kg	■ 적-R ■ 황-A ■ 녹-G ■ 청-B ■ 백-W
		AC/DC24V	0.20A	0.38kg	
		AC110V	0.10A	0.38kg	
		AC220V	0.10A	0.38kg	

ST56MC SERIES 사양지정 (Order Specification)

형식 (Model)	단수 (Layer)	전압 (Voltage)	색상 (Color)
·ST56MC	·1-1단	·12-DC12V	■ R-적 (Red)
·ST56MC-BZ	·2-2단	·24-DC24V	■ A-황 (Amber)
·ST56MCF	·3-3단	·110-AC110V	■ G-녹 (Green)
·ST56MCF-BZ	·4-4단	·220-AC220V	■ B-청 (Blue)
	·5-5단		■ W-백 (White)