

MODEL	MOSAIC GRAPHIC TOTALIZER
MR - M50	



MR-M50 is mosaic counter that is easy to installation by minaturize and lightous weight.

- It is also contains back up function : It is memorize the indication values of power failure before state.
- To easy to read, taking high bright red FND.

MODEL CODE

MR - M50-□


- 1. OPEN COLLECTOR
- 2. DRY CONTACT
- 3. VOLTAGE PULSE

ELECTRICAL SPECIFICATION


ITEM	SPECIFICATIONS
Dimension	75(W) × 25(H) × 110(D)mm
Input	Open collector, Dry contact Voltage pulse
Display	7 segment & 6 digit
FND size	0.33inch (red)
Scaling range	999999
Input impedance	10kΩ or more
Frequency range	2KHz(max)
Power supply	DC 24V, ±10% 2VA
Open collector sensing	DC 12V 3mA
Pulse amplitude.	500mV P-P ~ 50V P-P
Duty ratio.	10 ~ 90%
Ambient temp'/Humidity	0 ~ 50°C (10 ~ 90%)
Installation	Mounting(Panel Mounting)
Data back up	3.6V lithium 60mA/h
Weight	200g

INPUT CONNECTION EXAMPLES


1. Open collector

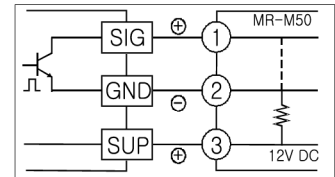

2. Dry contact

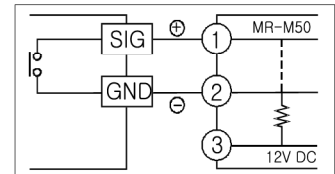


3. Voltage pulse

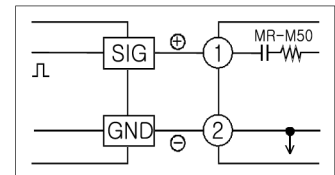


EXTERNAL DIMENSION, TERMINAL ARRANGEMENT & PANEL CUTOUT


TERMINAL ARRANGEMENT

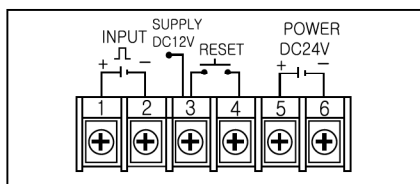

PANEL CUTTING

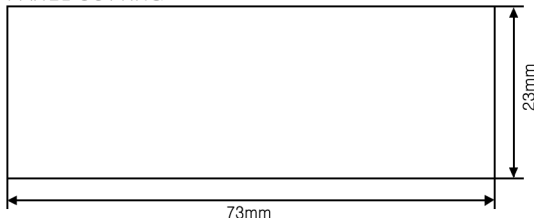

FRONT VIEW

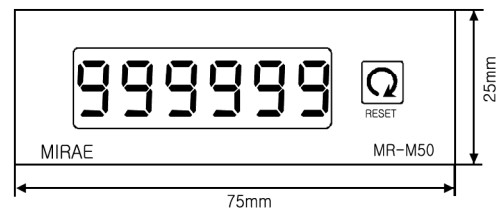

SIDE VIEW

